




MAGNOM: Stop the Chain Reaction of Wear

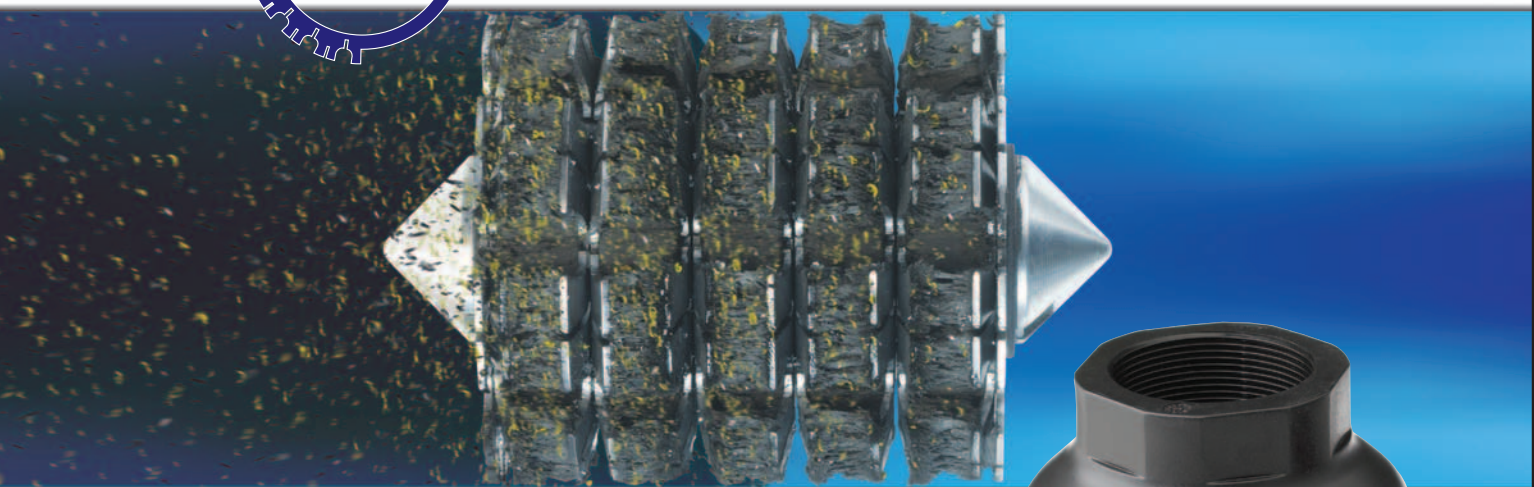

Product Data Sheet: PumpMate™

MOUNTING METHOD	SUCTION-LINE
FLOW DIRECTION	BI-DIRECTIONAL
CONSTRUCTION MATERIALS	
Housing	Acetal
Flux Plate	Chemically Blackened Mild Steel
Magnet	C8 Ceramic Ferrite
HOUSING PRESSURE AND TEMPERATURE RATING	
Max. Operating Pressure	Not Applicable (Suction Unit)
Burst Pressure	Not Applicable (Suction Unit)
Max. Temperature	212°F (100°C)
FLUID COMPATIBILITY	Compatible with a wide range of petroleum oils, synthetic fluids, water-glycols, water emulsions, hydraulic and lubrication fluids.



UNIT WEIGHT & DIMENSIONAL INFORMATION

PART NUMBER	UNIT	UNIT WEIGHT	(A)	(B)	CONTAMINANT CAPACITY
555102002	3/4" BSPP	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555103002	3/4" NPT	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555102005	1" BSPP	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555103005	1" NPT	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555102008	1 1/4" BSPP	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555103008	1 1/4" NPT	1 lb 5oz (600g)	3 3/8" (86mm)	3 1/8" (80mm)	140g
555102011	1 1/2" BSPP	2 lb 5oz (1050g)	4 3/4" (122mm)	3 3/4" (95mm)	200g
555103011	1 1/2" NPT	2 lb 5oz (1050g)	4 3/4" (122mm)	3 3/4" (95mm)	200g
555102014	2" BSPP	2 lb 5oz (1050g)	4 3/4" (122mm)	3 3/4" (95mm)	200g
555103014	2" NPT	2 lb 5oz (1050g)	4 3/4" (122mm)	3 3/4" (95mm)	200g
555102020	3" BSPP	5 lb 7oz (2450g)	7 5/16" (186mm)	4 5/8" (118mm)	400g
555103020	3" NPT	5 lb 7oz (2450g)	7 5/16" (186mm)	4 5/8" (118mm)	400g